

ENTLA dB-Favorit EI30

Schallhemmende Mittellage, Hartholz-Einleimer ringsum,
beidseitig 2 x 3,2 mm Hartplatten HDF




Das Türenwerk
im Entlebuch
www.entla.ch




Aufbau geschliffen

Rohmasse

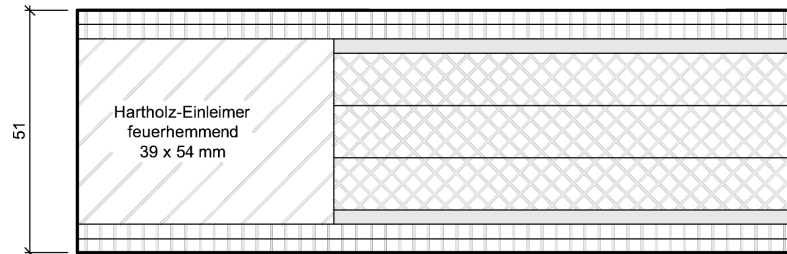

- 3.2 mm Hartplatte HDF
- 3.2 mm Hartplatte HDF
- 3.0 mm Kork
- 11 mm Pressspan
- 11 mm Pressspan
- 11 mm Pressspan
- 3.0 mm Kork
- 3.2 mm Hartplatte HDF
- 3.2 mm Hartplatte HDF

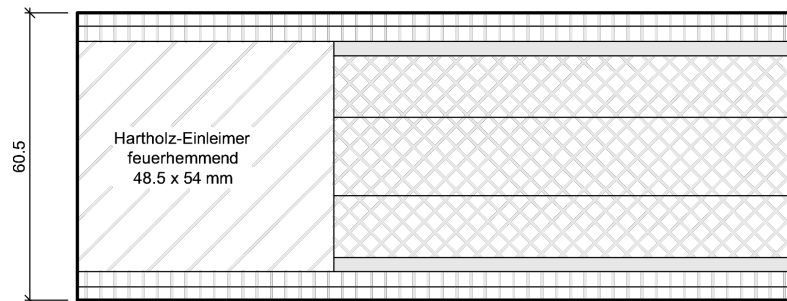

- 3.2 mm Hartplatte HDF
- 3.2 mm Hartplatte HDF
- 3.0 mm Kork
- 13 mm Pressspan
- 16.5 mm Pressspan
- 13 mm Pressspan
- 3.0 mm Kork
- 3.2 mm Hartplatte HDF
- 3.2 mm Hartplatte HDF

Dicke	Schallschutz	Klimaklasse	Wärmeschutz	Gewicht
51 mm	R _w = 42 dB	2a	1.3 W/m ² K	32.0 kg / m ²
	R' w 37 - 41 dB			
60.5 mm	R _w = 43 dB	2a	1.2 W/m ² K	37.0 kg / m ²
	R' w 37 - 42 dB			